


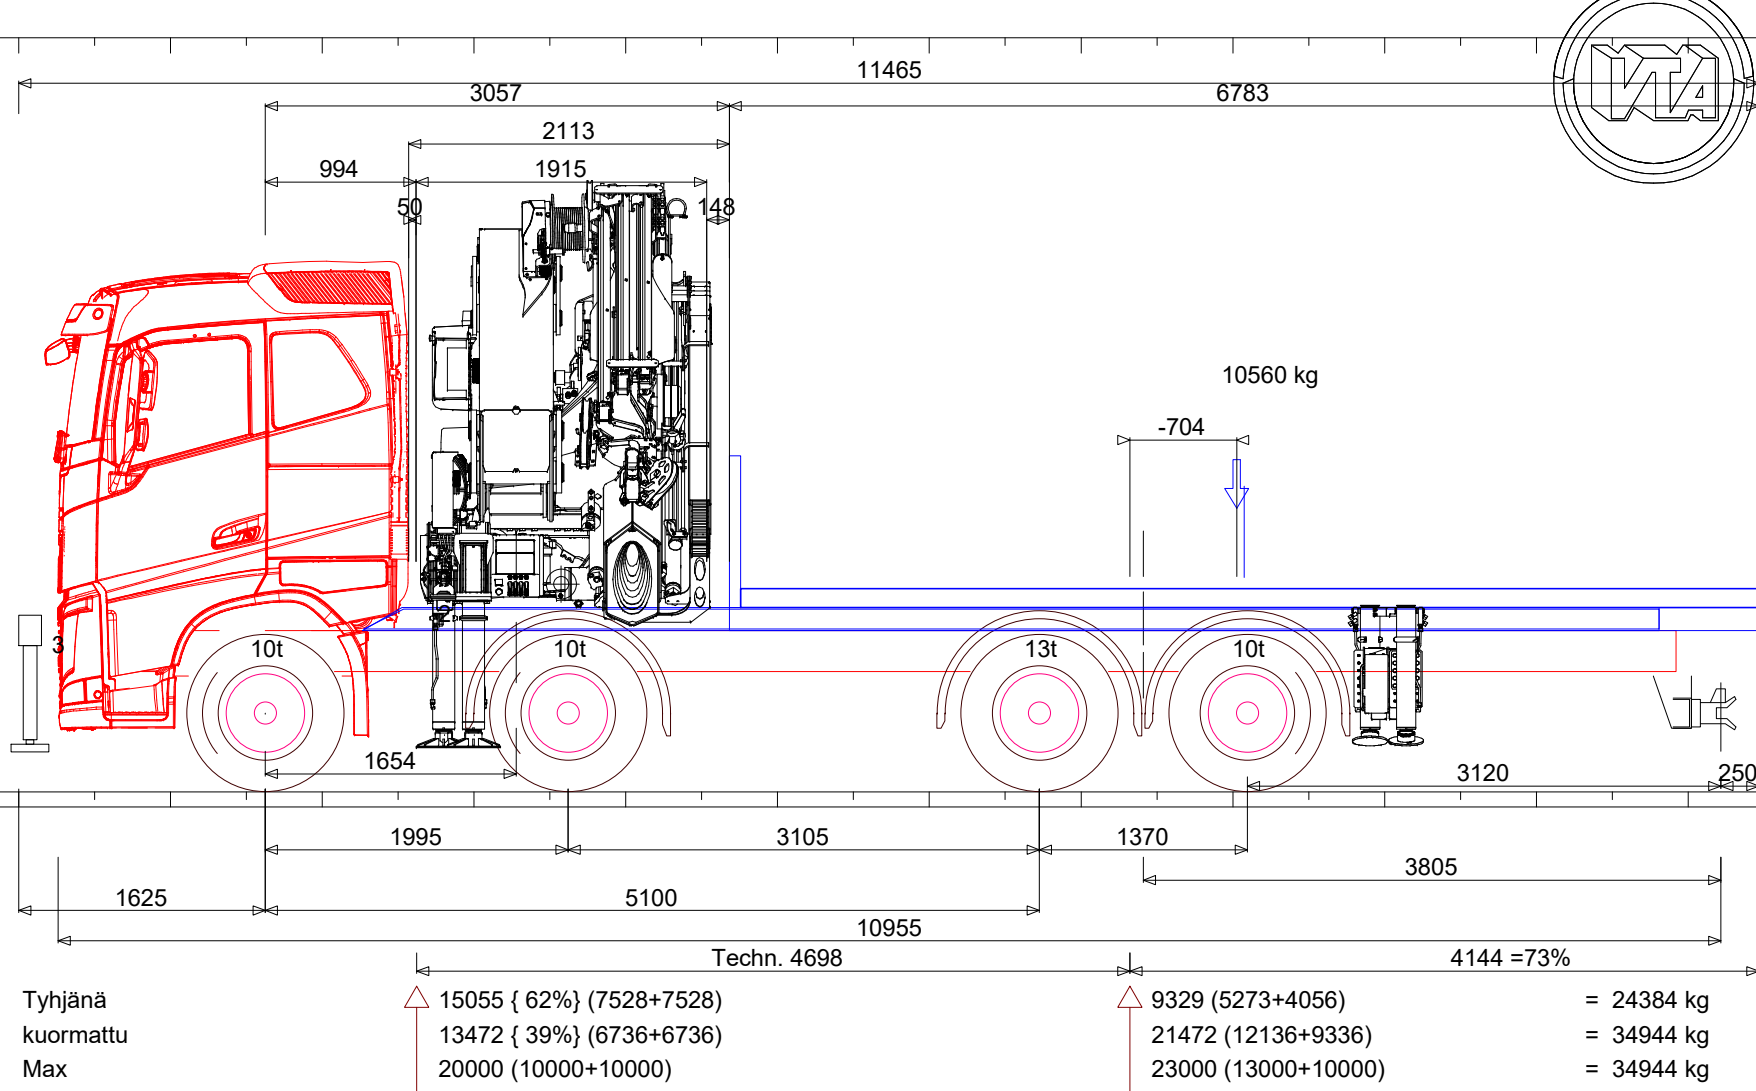


VOLVO FH 8X2 + PK92002-SH

VOLVO FH 82 Rigid Tag Rear Air FH 82F R3HA -5100 SLP AIRIN-HI VE13

VTA Tekniikka Oy Kuussillantie 23 01230 Vantaa puh.09-870800 fax.09-8765028

Subject to change, production tolerances have to be taken into account.

DPS ^{plus}
Dual Power System

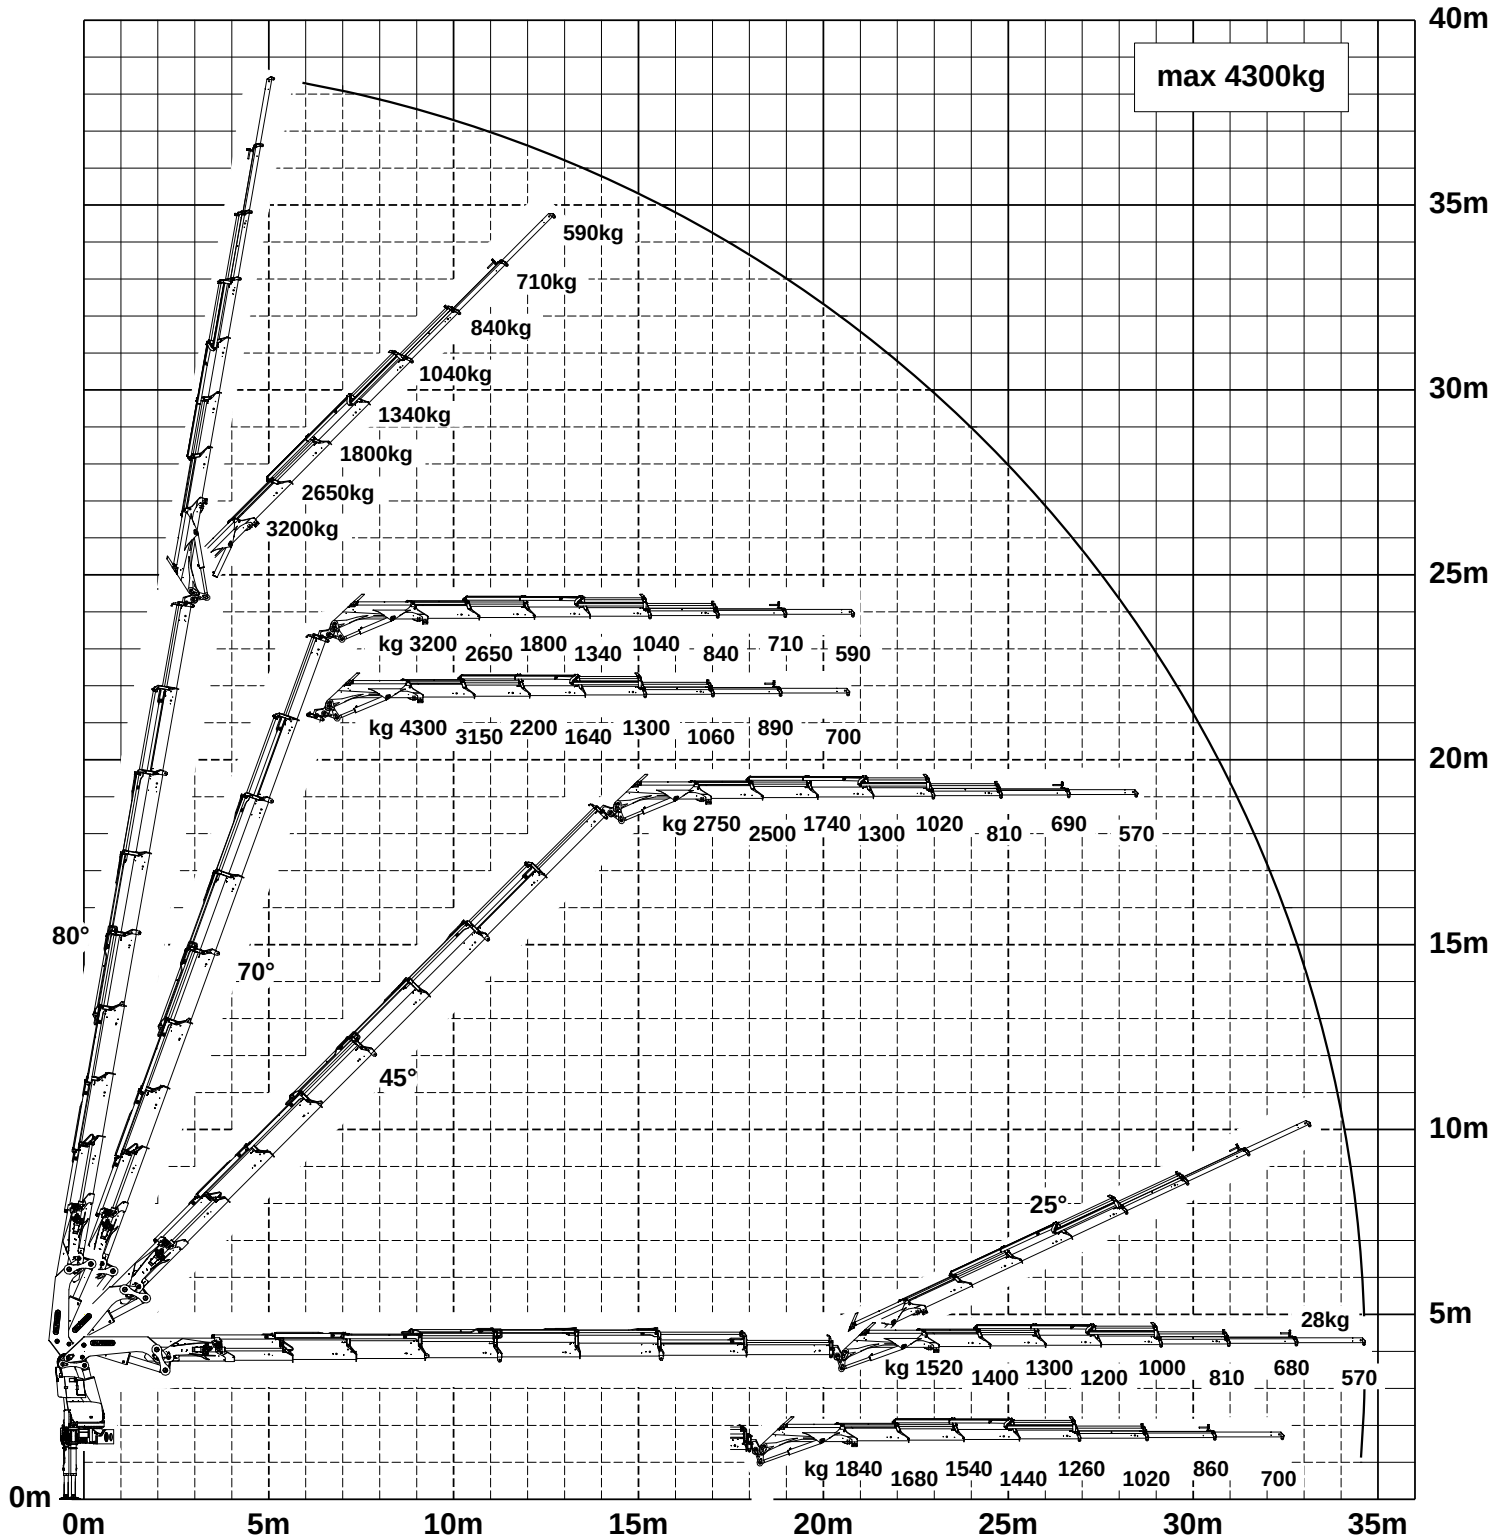

When using mechanical boom extensions, the loads shown on the charts need to be reduced by the weight of these extensions.
Symbolic crane figure, indications at 20° main boom position & load arm in horizontal position




For Rope winch load capacity refer to page

Page 020.31100 2.5t

Page 020.32100 3.5t

Subject to change, production tolerances have to be taken into account.

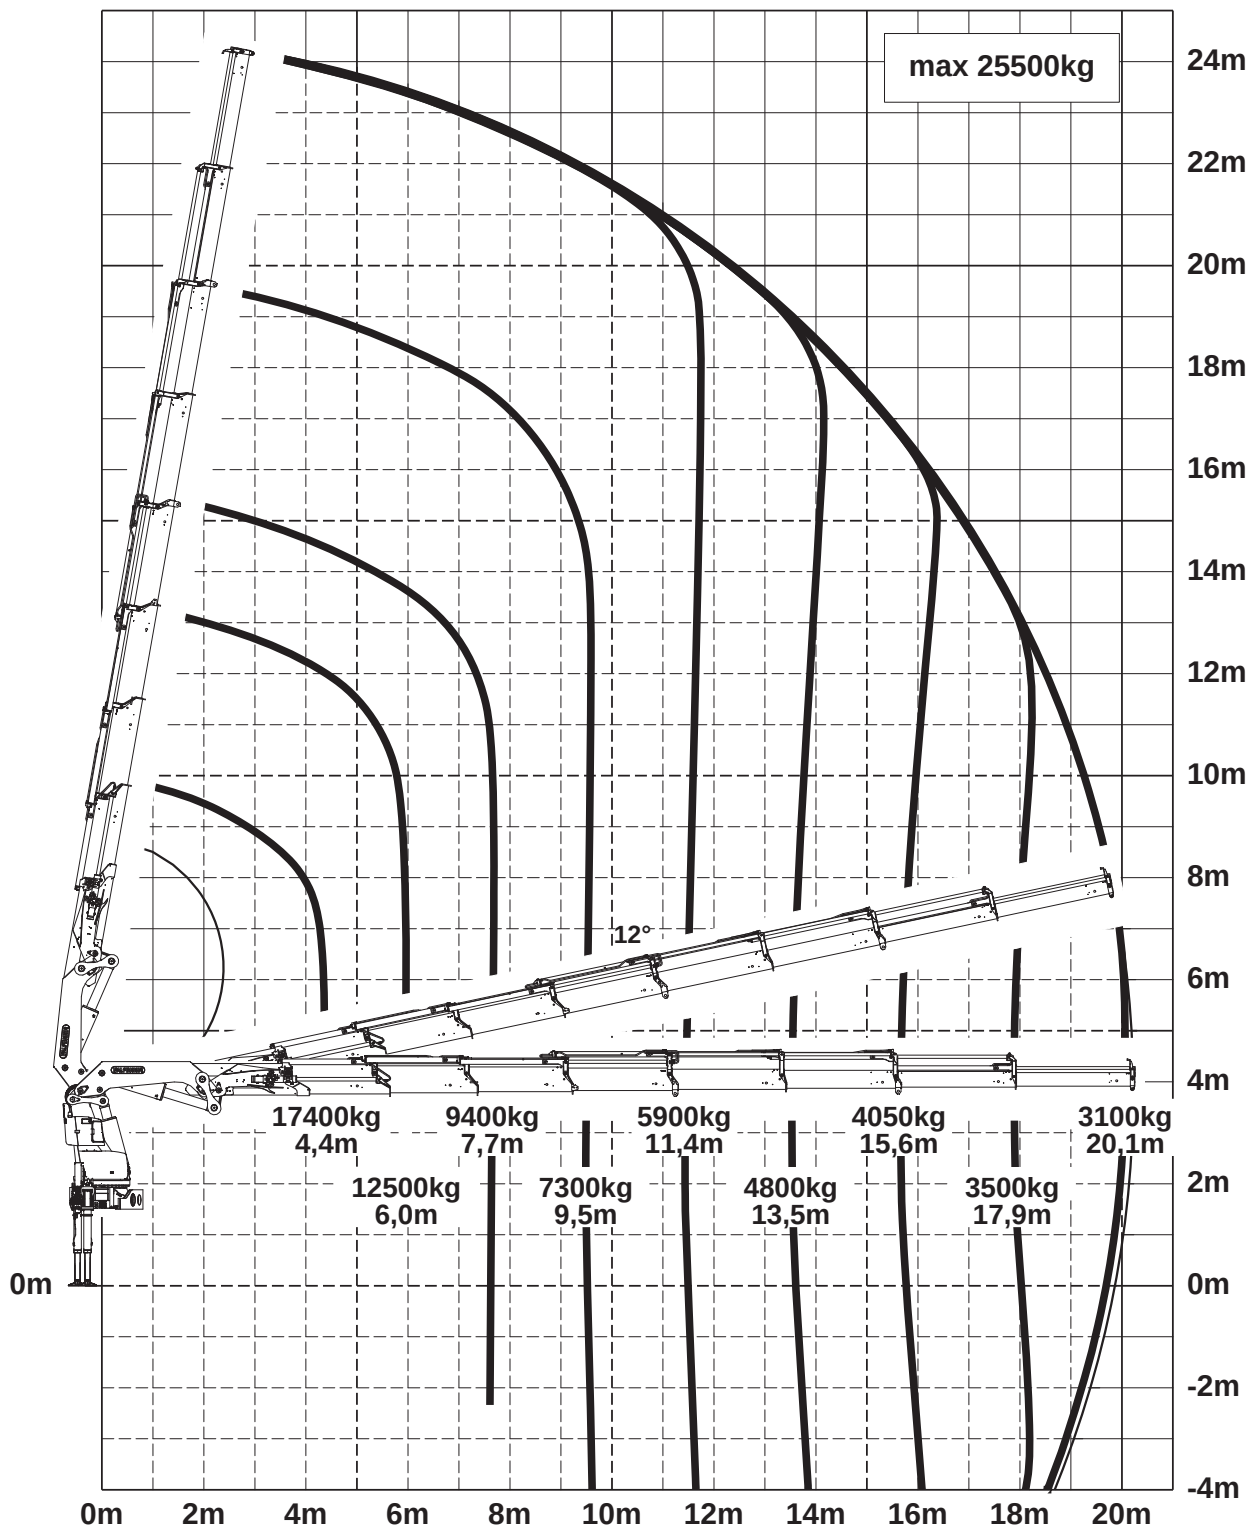

Symbolic crane figure, indications at 20° main boom position & load arm in horizontal position



For Rope winch load capacity refer to page

Page 020.31100 2.5t

Page 020.32100 3.5t